

DATA SHEET

Stationary

Automotive

Maritime

Rail

# PM 400 Stack Module

Fuel Cell Stack Module for integration into fuel cell systems


100%  
Energy

Zero  
Emission



Grafik/Foto: High-performance stack with bi-polar plates. Unique installation horizontally and vertically possible and worldwide only available with Proton Motor.

## Interfaces

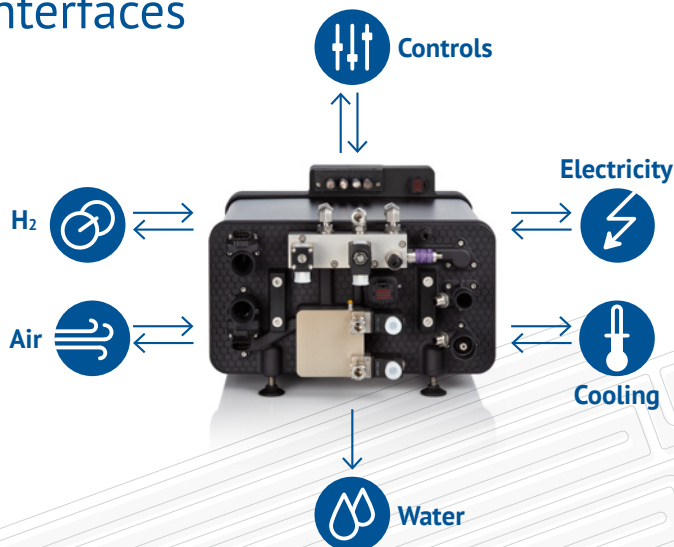

## Main benefits

- Freeze storage and start capable
- Long life time
- Liquid cooling (easy usability of the reaction heat)
- High reliability
- High efficiency
- Live monitoring and diagnosis
- Ideal for multiple applications
- No external humidification necessary
- Housed module
- No forced air ventilation needed
- Safe use – Stack housing explosion tested
- Most powerful stack with bi-polar plates

Type PM 400	48	72	96	120	144	168	192	216	240
<b>Electrical Output</b>									
Power Range* [kW]	2.1-14.2	3.1-21.3	4.1-28.4	5.1-35.5	6.2-42.6	7.2-49.7	8.2-56.8	9.2-64.0	10.3-71.0
Current Range [A]	0-500								
Voltage Range [V DC]	28-55	42-83	56-110	71-137	85-165	99-193	113-220	127-248	142-275
EL. System Efficiency* [%]	47-67								
<b>Hydrogen Interface</b>									
Hydrogen Quality	ISO 14687-2 / SAE J2719								
H2 Supply Pressure [bar.]	3.0-7.0							7.0 +/-0.5	
Hydrogen Consumption (max) [kg/h]	0.93	1.39	1.85	2.32	2.78	3.25	3.71	4.18	4.64
<b>Dimensions</b>									
Width x Height** [mm x mm]	436 x 279								
Length** [mm]	486	580	673	768	860	954	1048	1141	1235
Volume [l]	59.1	70.6	81.9	93.4	104.6	116.0	127.5	138.8	150.2
Tare weight [kg]	37	46	55	64	73	82	91	100	109

\* without peripherals  
\*\* main dimensions

## The PM 400 Fuel Cell Stack Module – the heart of PM’s technology

The PM Stack Module offers high performance and reliability. It is specially developed and manufactured by Proton Motor. Its straight forward and flexible integration makes the PM Stack Module ideal for multiple energy applications. In addition to the fuel cell stack, the stack module already includes electrical interfaces as well as communication and media connections.

### Included parts:

- Fuel cell stack
- Two main power switches to main DC/DC converter
- Pre-charging device for main DC/DC converter
- Voltage bleeding device
- Current sensor
- H2 purge valve
- H2 pressure sensor stack inlet
- H2 pressure switch stack inlet
- H2 pressure regulator stack inlet
- Main shut off valve stack inlet
- H2 filter stack inlet
- Anode water separator stack outlet
- Level switch anode water separator stack outlet
- Shut of valve anode water separator stack outlet
- Shut-off valve air outlet (back pressure)
- Temperature sensor cooling stack inlet
- Temperature sensor cooling stack outlet
- Temperature sensor air stack inlet
- Temperature sensor air stack outlet
- Cell voltage monitoring unit

### Environmental Conditions


Ambient Temperature [°C]	-35 to +45
Operating Altitude* [m]	< 2,000
Humidity** [% r.H.]	< 95

### Others

Conformity	CE
Protection Class	IP65

\* without de-rating  
\*\* non condensing

Specifications are subject to change without notice. Specifications and descriptions in this document were in effect at the time of publication. Proton Motor Fuel Cell GmbH reserves the right to changes at any time.

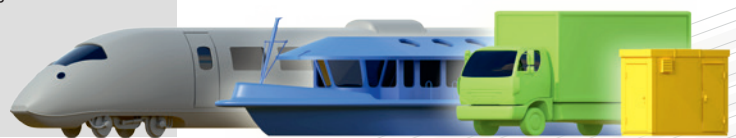

**Proton Motor Fuel Cell GmbH**  
Benzstraße 7  
D-82178 Puchheim  
Germany

Phone +49 (0) 89 1276265-11  
Fax +49 (0) 89 1276265-99  
email [sales@proton-motor.de](mailto:sales@proton-motor.de)  
Web [www.proton-motor.de](http://www.proton-motor.de)

Stationary

Automotive

Maritime

Rail